

ESA Series

3-10kW/5-48kWh | Single Phase Home Storage Solution (HV)

The GoodWe ESA Series is a fully integrated all-in-one solar and storage solution that combines inverter and battery in a pre-wired, modular design-making installation significantly faster and easier. Engineered for flexibility, the ESA system allows seamless expansion to meet evolving energy needs. 5kWh and 8kWh battery modules support 1C charging/discharging and can be mixed in a single stack up to 48kWh, with up to 6x stacks in parallel. The ESA provides UPS-level, full house back-up (63A) with no gateway needed. Models feature 2-4 MPPTs, each supporting up to 26A short-circuit input current. Safety features include 6-level battery protection and AI-driven AFCI 3.0 as standard, plus low noise levels of <35dB makes the ESA suitable for a wide variety of applications.



Optimized Performance

- 1C charge/discharge for rapid energy cycling
- Fanless design for quiet operation, noise <30dB
- 20A per string & 200% PV oversizing



Superb Safety & Reliability

- Advanced 6-layer safety protection
- Heating mode ensures reliable performance even in -20°C
- AI-driven AFCI 3.0 for safety¹



Flexible & Adaptable Applications

- Dual output ports for simplified installation & off-grid capability
- Flexible battery mixing with different capacity or old&new batteries
- Support full backup load with 63A output



Smart Control & Monitoring

- Seamless switching to backup <4ms
- One-click upgrade & one-click configuration

| Technical Data | | GW3K-EHA-G20 | GW3.6K-EHA-G20 | GW5K-EHA-G20 | GW6K-EHA-G20 | GW8K-EHA-G20 | GW9.999KEHA-G20 |
|---|---|---|---|---|---|---|-----------------|
| Battery Side | | | | | | | |
| Battery Type | LFP(LiFePO ₄) | | | | | | |
| Nominal Battery Voltage (V) | 380 | | | | | | |
| Battery Voltage Range (V) | 350 ~ 550 | | | | | | |
| Start-up Voltage (V) ¹ | 380 | | | | | | |
| Number of Battery Input | 1 | | | | | | |
| Max. Continuous Charging Current (A) | 11.9 | 14.3 | 19.8 | 23.7 | 31.6 | 35.6 | |
| Max. Continuous Discharging Current (A) | 8.7 | 10.5 | 14.5 | 17.4 | 23.2 | 29.0 | |
| Max. Charging Power (kW) | 4.5 | 5.4 | 7.5 | 9.0 | 12.0 | 13.5 | |
| Max. Discharging Power (kW) | 3.3 | 3.96 | 5.5 | 6.6 | 8.8 | 11.0 | |
| PV Side | | | | | | | |
| Max. Input Power (kW) | 6.0 | 7.2 | 10.0 | 12.0 | 16.0 | 20.0 | |
| Max. Input Voltage (V) ² | 600 | | | | | | |
| MPPT Operating Voltage Range (V) ³ | 40 ~ 560 | | | | | | |
| Start-up Voltage (V) | 50 | | | | | | |
| Nominal Input Voltage (V) | 400 | | | | | | |
| Max. MPPT Current (A) | 20 | | | | | | |
| Max. MPPT Short Circuit Current (A) | 26 | | | | | | |
| Number of MPPTs | 2 | 2 | 2 | 2 | 4 | 4 | |
| Number of Strings per MPPT | 1 / 1 | 1 / 1 | 1 / 1 | 1 / 1 | 1 / 1 / 1 / 1 | 1 / 1 / 1 / 1 | |
| AC Side (On-grid) | | | | | | | |
| Nominal Power (kW) | 3.0 | 3.6 | 5.0 | 6.0 | 8.0 | 9.999 | |
| Nominal Apparent Power to Grid (kVA) | 3.0 | 3.6 | 5.0 | 6.0 | 8.0 | 9.999 | |
| Max. Apparent Power to Grid (kVA) | 3.0 | 3.6 | 5.0 | 6.0 | 8.0 | 9.999 | |
| Max. Apparent Power from Grid (kVA) | 6.0 | 7.2 | 10.0 | 12.0 | 14.5 | 14.5 | |
| Nominal Voltage (V) | 220 / 230 / 240, L / N / PE | | | | | | |
| Voltage Range (V) | 170 ~ 280 | | | | | | |
| Nominal Frequency (Hz) | 50 / 60 | | | | | | |
| Frequency Range (Hz) | 45 ~ 55 / 55 ~ 65 | | | | | | |
| Max. Current to Grid (A) | 13.7 @ 220V 13.1 @ 230V 12.5 @ 240V | 16.4 @ 220V 15.7 @ 230V 15.0 @ 240V | 22.8 @ 220V 21.8 @ 230V 20.9 @ 240V | 27.3 @ 220V 26.1 @ 230V 25.0 @ 240V | 36.4 @ 220V 34.8 @ 230V 33.4 @ 240V | 43.5 @ 220V 43.5 @ 230V 41.7 @ 240V | |
| Max. Current From Grid (A) | 27.3 @ 220V 26.1 @ 230V 25.0 @ 240V | 32.8 @ 220V 31.4 @ 230V 30.0 @ 240V | 45.5 @ 220V 43.5 @ 230V 41.7 @ 240V | 50.0 @ 220V 50.0 @ 230V 50.0 @ 240V | 63.0 @ 220V 63.0 @ 230V 60.5 @ 240V | 63.0 @ 220V 63.0 @ 230V 60.5 @ 240V | |
| Power Factor | ~1 (Adjustable from 0.8 leading to 0.8 lagging) | | | | | | |
| THDi | <3% | | | | | | |
| Back-up Side | | | | | | | |
| Nominal Output Apparent Power (kVA) | 3.0 | 3.6 | 5.0 | 6.0 | 8.0 | 10.0 | |
| Max. Output Apparent Power(kVA) | 3.0 (6.0, 10s) | 3.6 (7.2, 10s) | 5.0 (10.0, 10s) | 6.0 (12.0, 10s) | 8.0 (16.0, 10s) | 10.0 (20.0, 10s) | |
| Max. Output Apparent Power (Bypass) (kVA) | 6.0 | 7.2 | 10.0 | 12.0 | 14.5 | 14.5 | |
| Max. Output Current (A) | 13.7 @ 220V 13.1 @ 230V 12.5 @ 240V | 16.4 @ 220V 15.7 @ 230V 15.0 @ 240V | 22.8 @ 220V 21.8 @ 230V 20.9 @ 240V | 27.3 @ 220V 26.1 @ 230V 25.0 @ 240V | 36.4 @ 220V 34.8 @ 230V 33.4 @ 240V | 43.5 @ 220V 43.5 @ 230V 41.7 @ 240V | |
| Max. Output Current (Bypass) (A) | 27.3 | 32.8 | 45.5 | 50.0 | 63.0 | 63.0 | |
| Nominal Output Voltage (V) | 220 / 230 / 240, L / N / PE | | | | | | |
| Nominal Output Frequency (Hz) | 50 / 60 | | | | | | |
| THDv (@Linear Load) | <3% | | | | | | |
| Efficiency | | | | | | | |
| Max. Efficiency | 97.6% | 97.6% | 97.6% | 97.6% | 97.5% | 97.5% | |
| European Efficiency | 96.5% | 96.5% | 96.8% | 97.0% | 96.8% | 96.8% | |
| Max. Battery to AC Efficiency | 98.0% | 98.0% | 98.0% | 98.0% | 97.8% | 97.8% | |
| Protection | | | | | | | |
| PV String Current Monitoring | Integrated | | | | | | |
| PV Insulation Resistance Detection | Integrated | | | | | | |
| Residual Current Monitoring | Integrated | | | | | | |
| PV Reverse Polarity Protection | Integrated | | | | | | |
| Battery Reverse Polarity Protection | Integrated | | | | | | |
| Anti-islanding Protection | Integrated | | | | | | |
| AC Overcurrent Protection | Integrated | | | | | | |
| AC Short Circuit Protection | Integrated | | | | | | |
| AC Overvoltage Protection | Integrated | | | | | | |
| DC Surge Protection | Type II | | | | | | |
| AC Surge Protection | Type II | | | | | | |
| RSD | Optional | | | | | | |
| AFCI | Integrated | | | | | | |
| Remote Shutdown | Integrated | | | | | | |
| General Data | | | | | | | |
| Operating Temperature Range (°C) | -35 ~ +60 (Derating at +40) | | | | | | |
| Relative Humidity | 0 ~ 95% | | | | | | |
| Max. Operating Altitude (m) | 4000 (>2000 derating) | | | | | | |
| Cooling Method | Natural convection | | | | | | |
| User Interface | LED, WLAN + APP | | | | | | |
| Communication with BMS | CAN | | | | | | |
| Communication | RS485, WiFi + LAN + Bluetooth | | | | | | |
| Communication Protocols | Modbus-RTU, Modbus-TCP | | | | | | |
| Weight (kg) | 24 | 24 | 24 | 24 | 26 | 26 | |
| Dimension (W x H x D mm) | 800 x 300 x 270 | | | | | | |
| Noise Emission | ≤30 | ≤30 | ≤30 | ≤30 | ≤35 | ≤35 | |
| Topology | Non-isolated | | | | | | |
| Ingress Protection Rating | IP66 | | | | | | |
| Mounting Method | Wall / Floor Mounted | | | | | | |
| Country of Manufacture | China | | | | | | |

*1: If there's no PV, start-up voltage will be 380V.
 *2: When the input voltage is 560V-600V, the inverter will enter standby mode, and the voltage returns to 560V to enter the normal operation state.
 *3: Please refer to the user manual for the MPPT Voltage Range at Nominal Power.
 *: Please visit GoodWe website for the latest certificates.

GoodWe-Single page-20250828-AU-V2.1. Information may be subject to change without notice during product improving.


| Technical Data | | GW5.1-BAT-D-G20 | GW8.3-BAT-D-G20 | GW5.1-BAT-D-G21 | GW8.3-BAT-D-G21 |
|--|----------------|--|-----------------|-----------------|-----------------|
| Rated Energy (kWh) | | 5.12 | 8.32 | 5.12 | 8.32 |
| Usable Energy (kWh) | | 5 ¹ | 8 ² | 5 ¹ | 8 ² |
| Battery Type | | LFP (LiFePO ₄) | | | |
| Nominal System Voltage (V) | | Charge: 420V; Discharge: 380V | | | |
| Operating Voltage Range (V) (single phase system) | | 350 ~ 550 | | | |
| Operating Voltage Range (V) (three phase system) | | 700 ~ 950 | | | |
| Max. Input Current (System) (A) | | 12 | 19 | 12 | 19 |
| Max. Output Current (System) (A) | | 13.2 | 21.0 | 13.2 | 21.0 |
| Max. Input Power (System) (kW) ³ | | 5 | 8 | 5 | 8 |
| Max. Output Power (System) (kW) ³ | | 5 | 8 | 5 | 8 |
| Peak.Output Power (System) (kW) ³ | | 7.5 @ 10s | 12 @ 10s | 7.5 @ 10s | 12 @ 10s |
| Charging Temperature Range (°C) | | -18 ~ +55 | -18 ~ +55 | +2 ~ +55 | +2 ~ +55 |
| Discharging Temperature Range (°C) | | -20 ~ +55 | | | |
| Relative Humidity | | 5 - 95% | | | |
| Max. Operating Altitude (m) | | 4000 | | | |
| Noise Emission (dB) | | ≤29 | | | |
| Communication | | CAN | | | |
| Weight (kg) | | 57.5 ± 1 | 79.0 ± 1 | 57.5 ± 1 | 79.0 ± 1 |
| Dimensions (W × H × D mm) | | 800 × 326 × 270 | | | |
| Optional Function Configuration | | Heating | Heating | - | - |
| Ingress Protection | | IP66 | | | |
| Max. Storage time | | 12 months (-20°C ~ +35°C) 6 months (+35°C ~ +45°C) | | | |
| Scalability | | 6 pcs | | | |
| Mounting Method | | Floor stacked / Wall-mounted | | | |
| Country of Manufacture | | China | | | |
| Standard and Certification | Safety | IEC62619, IEC60730, EN62477, IEC63056, IEC62040, CE, CEC | | | |
| | EMC | CE, RCM | | | |
| | Transportation | UN38.3, ADR | | | |

*1: Test conditions, 98% DOD (cell 2.85 ~ 3.6V voltage range), 0.2P charge & discharge at 25 ± 2°C for battery system at the beginning of life. Usable energy is defined by its initial design value. Actual available energy may vary depending on charge / discharge rate, environmental conditions (e.g. temperature), transport and storage factors.

*2: Test conditions, 96% DOD (cell 2.85 ~ 3.6V voltage range), 0.2P charge & discharge at 25 ± 2°C for battery system at the beginning of life. Usable energy is defined by its initial design value. Actual available energy may vary depending on charge / discharge rate, environmental conditions (e.g. temperature), transport and storage factors.

*3: Max. Input Power / Max. Output Power / Peak.Output Power derating will occur related to Temperature and SOC.

*: Please visit GoodWe website for the latest certificates.

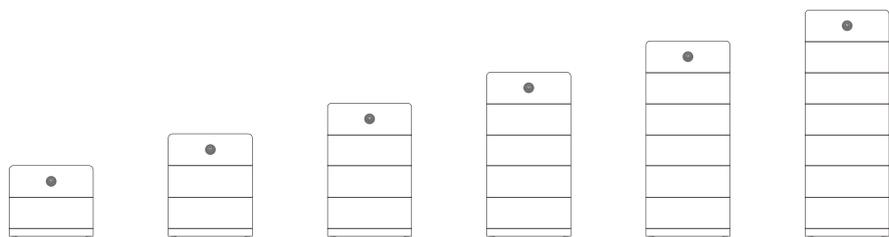

| Number of Battery Modules (pcs) | 1 | 2 | 3 | 4 | 5 | 6 |
|---------------------------------|------|-------|-------|-------|-------|-------|
| Total Energy Capacity (kWh) | 5.12 | 10.24 | 15.36 | 20.48 | 25.60 | 30.72 |
| Total Energy Capacity (kWh) | 8.32 | 16.64 | 24.96 | 33.28 | 41.60 | 49.92 |